


EPIC Board

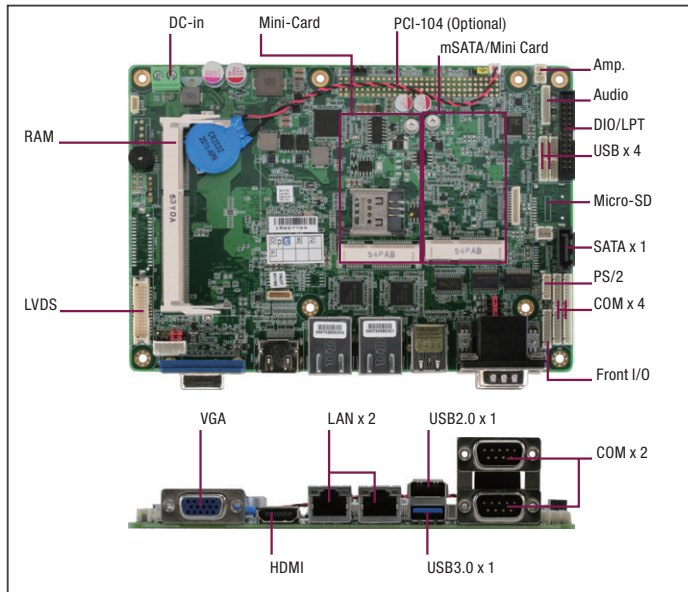


Features

- Onboard Intel® Atom™ E3845/ Celeron® J1900, N2807 Processor SoC
- DDR3L 1333MHz SoDIMM x 1, Up to 8GB
- LVDS 24-bit Dual Channel
- Dual Display Configuration: VGA+ LVDS, VGA + HDMI or HDMI + LVDS
- SATA 3.0Gb/s x 1, mSATA/ Mini-Card x 1, Micro-SD Slot x 1 (E3800 Series Only)
- USB 3.0 x 1, USB2.0 x 5, RS-232 x 4, RS-232/422/485 x 2 (COM2, COM3)
- Mini-Card x 1, SIM x 1, PCI-104 (Optional)
- 16-bit Digital IO/LPT, SMBus x 1, I2C (Optional)
- Audio 2CH, 2W Audio Amp., TPM (Optional), Touch Controller (Optional)
- 9 ~ 24VDC Wide Range or 12VDC Power Input
- SoC Processor on Solder Side Design

Specifications

System	
Form Factor	EPIC
CPU	Intel® Atom™/ Celeron® E3845/J1900/N2807
CPU Frequency	Up to 2.0 GHz
Chipset	Intel® Atom™/ Celeron® SOC
Memory Type	DDR3L 1333, SODIMM x 1
Max. Memory Capacity	Up to 8G
BIOS	AMI
Wake on LAN	Yes
Watchdog Timer	255 Levels
Power Requirement	+12V or 9-24V AT/ATX (default)
Power Supply Type	AT/ ATX
Power Consumption (Typical)	11.8W
Dimension (L x W)	4.53" x 6.50" (115mm x 165mm)
Operating Temperature	32°F ~ 140°F (0°C ~ 60°C)
Storage Temperature	-40°F ~ 176°F (-40°C ~ 80°C)
Operating Humidity	0% ~ 90% relative humidity, non-condensing
MTBF (Hours)	110,000
Certification	CE/FCC
Display	
VGA/LCD Controller	Intel® Atom™/ Celeron® SOC
Video Output	CRT, LVDS, HDMI
Backlight Inverter Supply	Max. 12V
I/O	
Ethernet	Intel® i211 Gigabit Ethernet, RJ-45 x 2
Audio	High Definition Audio Interface
USB Port	USB2.0 x 5 USB3.0 x 1
Serial Port	COM1, 4, 5, 6 : RS-232 x 4 COM2, 3 : RS-232/422/485 x 1 (Ring/ +5V/ +12V)
Parallel Port	SPP/EPP/ECP x 1
HDD Interface	SATA 2.0 x 1
FDD Interface	—
SSD	mSATA x 1 (Share with half-size Mini-Card by BOM)
Expansion Slot	Mini-Card x 1, Micro-SD x 1 (Only E3800 series) PCI-104 x 1 (optional) 16-bit DIO or LPT SMBus x 1, I2C x 1 (optional), PS/2 x 1
PWM LCD Support	—
DIO	16-bit
TPM	Optional
Touch	Optional



Packing List


- 1709070500
SATA Cable
- 1702150155
SATA Power Cable
- M10BT07010
Heat-Spreader
- Product DVD
- EPIC-BT07

Optional Accessories

Part Number	Description	QTY
170204010R	2-Pin Power in to 4-Pin Housing Cable	1
1709100254	Audio Cable	1
1701260200	DIO/LPT Cable	1
1700050207	USB Cable	4
1700060155	PS/2 KB/Mouse Cable	1
1701090150	COM Cable	4
EPIC-BT07-HSK01	Metal, Al, Heat Sink, 165*95*14mm, Silver, EPIC-BT07 (Used with heatspreader)	1


EPIC Board

Block Diagram

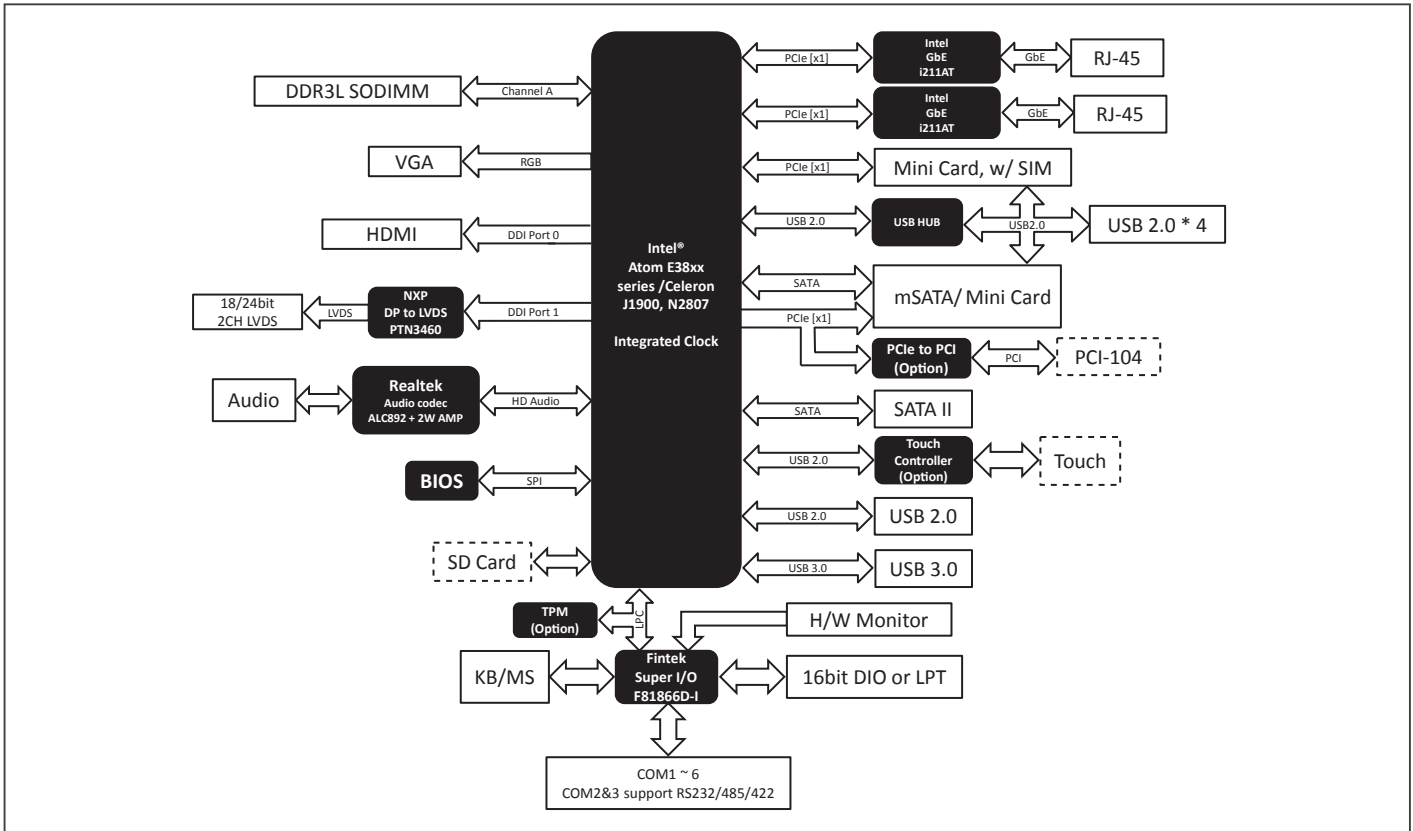

Dimension

Unit: mm

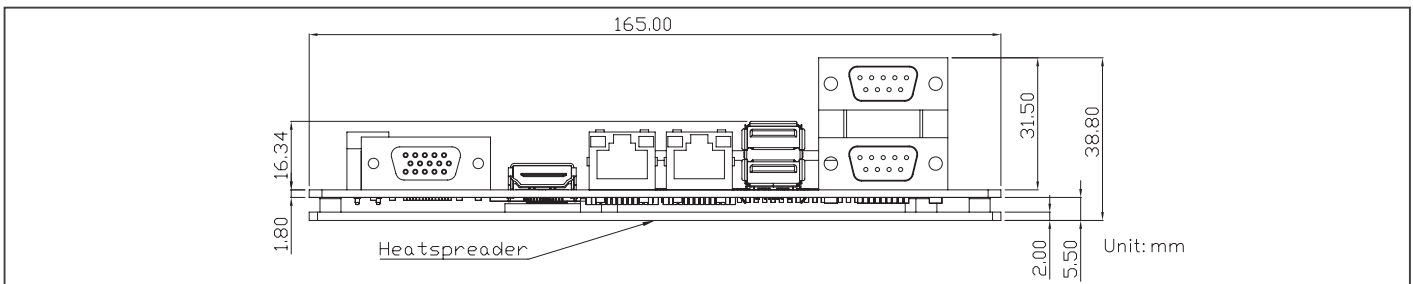

Ordering Information

Part Number	CPU	Memory	Fan/Fanless	Display	LVDS	Storage	LAN	USB	RS-232	RS-232/422/485	Expansion Slot	Power	Operating Temp	Others
EPIC-BT07-A10-0001	Atom™ E3845 (10W)	DDR3L (Max. 8GB)	Heat-Spreader (Heat-sink option)	VGA+LVDS, VGA+HDMI, LVDS+HDMI	24b, 2CH	SATA 2 x 1, mSATA x 1	GbE x 2	USB3.0 x 1 USB2.0 x 5	4	2	Mini-Card x 1, SIM x 1, PCI-104 x 1, Micro-SD x 1	9-24VDC, AT/ATX	0°C – 60°C	16CH DIO or LPT, Audio, 2W Amp, PS/2, SMBus
EPIC-BT07-A10-0002	Celeron® J1900 (10W)	DDR3L (Max. 8GB)	Heat-Spreader (Heat-sink option)	VGA+LVDS, VGA+HDMI, LVDS+HDMI	24b, 2CH	SATA 2 x 1, mSATA x 1	GbE x 2	USB3.0 x 1 USB2.0 x 5	4	2	Mini-Card x 1, SIM x 1	9-24VDC, AT/ATX	0°C – 60°C	16CH DIO or LPT, Audio, 2W Amp, PS/2, SMBus
EPIC-BT07-A10-0003	Celeron® N2807 (4.3W)	DDR3L (Max. 4GB)	Heat-Spreader (Heat-sink option)	VGA+LVDS, VGA+HDMI, LVDS+HDMI	24b, 2CH	SATA 2 x 1, mSATA x 1	GbE x 2	USB3.0 x 1 USB2.0 x 5	4	2	Mini-Card x 1, SIM x 1	9-24VDC, AT/ATX	0°C – 60°C	16CH DIO or LPT, Audio, 2W Amp, PS/2, SMBus
EPIC-BT07W2-A10-0001	Atom™ E3845 (10W)	DDR3L (Max. 8GB)	Heat-Spreader (Heat-sink option)	VGA+LVDS, VGA+HDMI, LVDS+HDMI	24b, 2CH	SATA 2 x 1, mSATA x 1	GbE x 2	USB3.0 x 1 USB2.0 x 5	4	2	Mini-Card x 1, SIM x 1, PCI-104 x 1, Micro-SD x 1	9-24VDC, AT/ATX	-40°C – 85°C	16CH DIO or LPT, Audio, 2W Amp, PS/2, SMBus