



3,5" Board



IB898 with Heat spreader

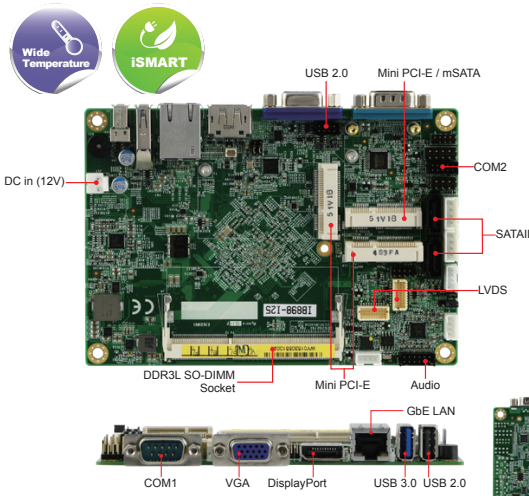

IB898 with Heatsink

Features

- Onboard Intel® Atom™ E3845 QC/ E3825 DC/ E3815 SC SoC, 1.9/1.33/1.46GHz
- 1x DDR3L-1066 SO-DIMM, Max. 4GB
- Supports VGA, DisplayPort and 24-bit dual channel LVDS
- 1x Intel® I210IT PCI-E Gigabit LAN
- Watchdog timer, Digital I/O, mSATA, iSMART
- 3x USB 2.0, 1x USB 3.0, 2x COM, 2x SATA II
- 3x Mini PCI-E slots (2x full-size, 1x half-size)
- Wide-range operating temperature

Specifications

CPU Socket	Intel® Atom™ QC E3845 (1.9GHz, 2MB cache) Intel® Atom™ DC E3825 (1.33GHz, 1MB cache) Intel® Atom™ SC E3815 (1.46GHz, 512KB cache)
System Memory	1x DDR3L-1066 SO-DIMM, Max 4GB (Non-ECC)
System Chipset	Integrated in Intel® Atom™ SoC
BIOS	AMI
Watchdog Timer	256 levels
SSD	1x mSATA
H/W Monitor	Yes
Expansion Slot	3x Mini PCI-E (2x full-size, 1x half-size)
VGA Controller	Intel® Atom™ SoC integrated Gen7 4EUs graphics
VGA Memory	Shared memory
Display Interface	Supports CRT, DisplayPort, and 24-bit dual channel LVDS
LAN Controller	1x Intel® I210IT PCI-E Gigabit LAN
LAN Connector	1x RJ-45 on board
I/O Chipset	Nuvoton NCT5523D 1x RS232/422/485 (jumperless selection) 1x RS232
USB	1x USB 3.0 on board 1x USB 2.0 on board 2x USB 2.0 via pin header
Serial ATA	2x SATA II
Audio	Intel® Atom™ SoC built-in HD Audio controller + Realtek ALC269QHD codec w/ class-D amplifier
Others	Digital I/O, +12V DC-In, iSMART Wide-range operating temperature
Dimensions	102mm x 147mm (4" x 5.8")
Max. Power Requirement	Intel® Atom™ E3825 1.33GHz w/ 4GB DDR3L-1600 +12V: 0.65A
Operating Temperature	-40°C ~ 85°C (-40°F ~ 185°F)
Storage Temperature	-40°C ~ 90°C (-40°F ~ 194°F)
Relative Humidity	90% (non-condensing @60°C)

Ordering Information

IB898-I25	Intel® Atom™ E3825 (1.33GHz) 3.5-inch Disk Size SBC w/ PCI-E GbE LAN, CRT, DisplayPort & LVDS (24-bit LVDS dual channel), mSATA, iSMART, Wide-range temperature support
IB898-I15	Intel® Atom™ E3815 (1.46GHz) 3.5-inch Disk Size SBC w/ PCI-E GbE LAN, CRT, DisplayPort & LVDS (24-bit LVDS dual channel), mSATA, iSMART 3.1, Wide-range temperature support
IB898-I45(MOQ)	Intel® Atom™ E3845 (1.9GHz) 3.5-inch Disk Size SBC w/ PCI-E GbE LAN, CRT, DisplayPort & LVDS (24-bit LVDS dual channel), mSATA, iSMART, Wide-range temperature support
HSIB898-BGA-A	Heatsink for IB898
HSIB898-BGA-1	Heat Spreader for IB898
IB76A-1	Cable Kit w/ USB, COM, Power, SATA + Power cable

Dimensions and Drawing

