



PICMG1.3 Board, Full-Size

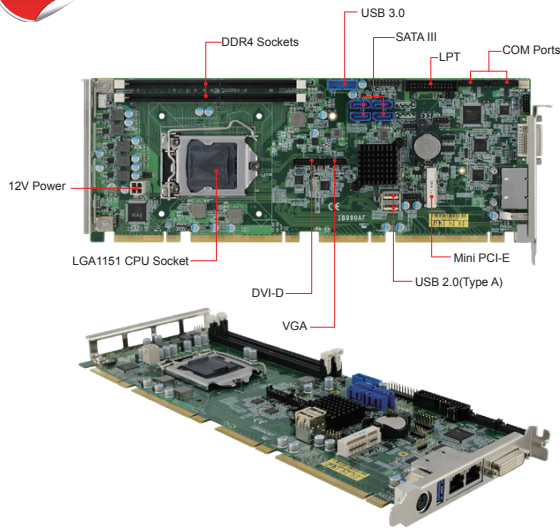

Features

- 7th/6th Gen Intel® Xeon® E3/Core™ i7/i5/i3/ Pentium® QC/DC Processor, up to 4.0 GHz
- 2x DDR4- 2133 DIMM, Max. 32GB, ECC compatible
- Intel® processor integrated graphics, supports DVI-I, CRT, DVI-D
- 2x Intel® PCI-E Gigabit LAN
- 3x USB3.0, 2x USB2.0, 4x COM, 6x SATA III
- 1x Mini PCI-E slot
- Watchdog timer, Digital I/O, iAMT (11.0)



Specifications

CPU	LGA1151 for 7th/6th Gen Intel® DT Xeon® E3 & Core™ i7/i5/i3/Pentium®/ Celeron® QC/DC processors
System Memory	2x DDR4-2133 DIMM, Max 32GB (ECC compatible)
System Chipset	IB990AF-C236: Intel® C236 PCH IB990AF: Intel® Q170 PCH
BIOS	AMI
Watchdog Timer	256 levels
SSD	N/A
H/W Monitor	Yes
Expansion Slots	1x Mini PCI-E
VGA Controller	7th/6th Gen Intel® Core™ DT Xeon® E3 & Core™ i7/i5/i3/ Pentium®/ Celeron® integrated graphics
VGA Memory	Max. shared memory – 1024MB
Display Interface	Support DVI-I, VGA, DVI-D
LAN Controller	Intel® I219LM Gigabit LAN PHY Intel® I211AT PCI-E Gigabit LAN(as 2nd LAN)
LAN Connector	2x RJ-45 on board
I/O Chipset	Fintek F81846AD-I 1x RS232/422/485(Jumperless selection) 3x RS232, 1x LPT
USB	3x USB 3.0 on board 2x USB 2.0 (Type A) 1x USB 2.0 via Mini PCI-E
Serial ATA	6x SATA III
Audio	Intel® C236 PCH built-in HD audio controller + Realtek ALC662 w/ 5.1 channel
Others	Digital I/O(4-in/4-out), RAID, iAMT(11.0)
Dimensions	338mm x 126mm(13.31" x 4.96"), TPM(1.2)(IB990AF only)
Max. Power Requirement	Intel® Xeon® processor E3-1225 v5 w/ 2x DDR4-2133 4GB +12V: 5.67A; +5V: 1.88A; +5VSB: 0.09A; +3.3V: 0.08A
Operating Temperature	0°C ~ 60°C(32°F ~ 140°F)
Storage Temperature	-20°C ~ 80°C(-4°F ~ 140°F)
Relative Humidity	90%(non-condensing @60°C)

Ordering Information

IB990AF-C236	LGA1151 C236 PICMG 1.3 Full-Size CPU Card w/ DVI-I, VGA, DVI-D, dual Gigabit LAN, iAMT(11.0), 6x SATA III
IB990AF	LGA1151 Q170 PICMG 1.3 Full-Size CPU Card w/ DVI-I, VGA, DVI-D, dual Gigabit LAN, iAMT(11.0), 4x SATA III

Dimensions and Drawing

