

Panel PC - HMI

Ordering Information

Part No.	Description	
Resistive Touch Screen AFL2-12A-HM65/R-R15	12.1" 600cd/m ² XGA panel PC, 802.11b/g/n wireless module, resistive touch screen, 2M camera, microphone, dual GbE LAN, R15	
Projective Capacitive Touch Screen AFL2-12A-HM65/PC-R15	12.1" 600cd/m ² XGA panel PC, 802.11b/g/n wireless module, projected capacitive touchscreen, 2M camera, microphone, dual GbE LAN, R15	
CPU Selection	CPU-MB-i7-2640M	2nd Generation Intel® Core™ i7 Processor [Mobile], PPGA-988, dual core 2.8GHz, 35W, iAMT
	CPU-MB-i5-2510E	2nd Generation Intel® Core™ i5 Processor [Mobile], PPGA-988, dual core 2.5GHz, 35W, iAMT
	CPU-MB-i3-2310M	2nd Generation Intel® Core™ i3 Processor [Mobile], PPGA-988, dual core 2.1GHz, 35W
	CPU-MB-CM-B810	Intel® Celeron® Mobile Processor, PPGA-988, dual core 1.6GHz, 35 W
	CPU-MB-CM-B710	Intel® Celeron® Mobile Processor, PPGA-988, single core 1.6GHz, 35 W
Memory Selection	DDR3-SO-1333-1GB	SO-DIMM DDR3 1333MHz 1GB
	DDR3-SO-1333-2GB	SO-DIMM DDR3 1333MHz 2GB
	DDR3-SO-1333-4GB	SO-DIMM DDR3 1333MHz 4GB

Options


Item	AFL2-12A-HM65
Panel Mounting Kit	AFLPK-15
Wall Mounting Kit	AFLWK-19B
Rack Mounting Kit	AFL2RK-12
Arm	ARM-11-RS
Stand	STAND-A12-RS/STAND-A19-RS/STAND-A21-R10/ STAND-C12-R10
V-Stand	VSTAND-A12-R11
Magnetic Stripe Reader Kit	AFL2P-12AMSR-U-R10
EM RFID Reader	AFL2-EM-RFID-KIT01-R10
Mifare RFID Reader	AFL2-MF-RFID-KIT01-R11
OS: Win XPE (2GB CF Card)	AFL2-12A-HM65-XPE-R15*
OS: Win XPE (4GB CF Card)	AFL2-12A-HM65-XPE-R15*
OS: Win 7 Embedded (4GB CF Card)	AFL2-12A-HM65-WES7P-R14* (for Projected Capacitive Touch) AFL2-12A-HM65-WES7E-R14* (for Resistive Touch)

*OS image with CD-ROM or DVD-ROM

Packing List

Item	P/N	Q'ty	Description
Utility CD		1	Drivers and user manual
One Key Recovery CD		1	
Power Adapter	63040-010090-120-RS	1	90W ;19VDC output
Power Cord	32702-000401-100-RS	1	1500 mm, European Standard
Power Transfer Cord	32702-000300-100-RS	1	
M3 Screw Pack	44013-030041-RS	4	M3*4 for securing HDD
M4 Screw Pack	44403-040061-RS	4	M4*4 VESA screw
Touch Pen	43125-0002C0-00-RS	1	
RJ-45 to DB-9 COM Port Cable	32005-000200-200-RS	1	
IR Remote Controller	7Z000-SLPCB005-RS	1	
RS-422 Cable	32205-002400-100-RS	1	
Pen	43125-0002C0-00-RS	1	For Resistive Touch

AFL2-12A-HM65 Fully Integrated I/O

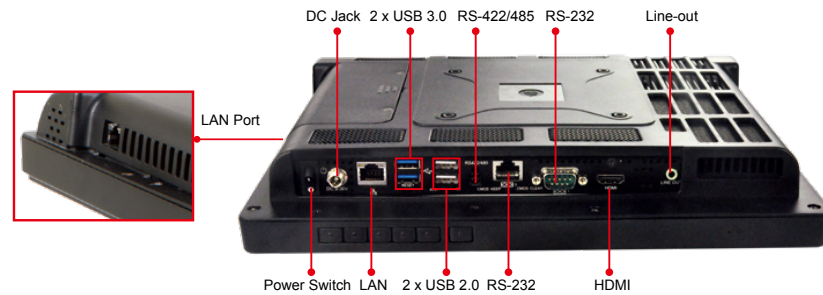

AFL2-12A-HM65 Dimensions (Unit: mm)

