

Nuvo-2510VTC Series

Intel® Atom™ Bay Trail In-vehicle Fanless Computer with 2x IEEE 802.3at PoE+ Ports



Key Features

- Intel® Atom™ Bay Trail E3845 quad-core processor
- Dual mPCIe and USIM sockets for 3G, LTE, WLAN, BT or GPS module
- Dual storage with 1x mSATA and 1x SATA
- Intelligent ignition power control
- 1x CAN bus port (CAN 2.0A/ CAN 2.0B compliance)
- 8 to 35V DC wide-range DC input
- Operating temperature from -25° to 70°C
- Patented damping bracket* increases stability with HDD
- E13 No. 10R-0513905



*R.O.C Patent No. M491752

Introduction

Nuvo-2510VTC is an in-vehicle fanless computer with Intel® Atom™ E3845 quad-core processor. Equipped with 2 IEEE 802.3at Gigabit Ethernet ports, Nuvo-2510VTC is capable of driving 25W GigE and PoE IP cameras with a single standard CAT-5e. Along with intelligent ignition power control and built-in CAN bus, Nuvo-2510VTC is ideal for light-weight mobile applications such as mobile NVR and mobile ANPR.

Designed for in-vehicle applications, Nuvo-2510VTC supports wide-range DC input and can be powered by 12VDC or 24VDC vehicle battery. It features intelligent ignition power control with selectable on and off delay and battery voltage monitoring. Nuvo-2510VTC also supports one built-in CAN bus port with compliance to CAN 2.0A and CAN 2.0B. The CAN bus is the foundation of various vehicles protocols.

Nuvo-2510VTC provides 2 PoE+ Gigabit Ethernet ports and 1 USB3.0 port for industrial-grade cameras on IP cameras. There are also 4 serial ports and 3 USB2.0 ports available. For mobile applications which require data transmission, Nuvo-2510VTC can install two 3G/4G modules with USIMs in its 2 mini PCI Express (mPCIe) sockets. Nuvo-2510VTC is ideal for in-vehicle applications.


Specifications

System Core		Expansion Bus	
Processor	Intel® Atom™ Bay Trail E3845 quad-core processor (1.91 GHz, 2M cache)	Mini PCI-E	1x full-sized mini PCI Express socket with USIM socket (PCIe + USB) 1x full-sized mini PCI Express socket with external USIM socket (USB)
Graphics	Integrated Intel® HD graphics	Power Supply	DC Input
Memory	Up to 8GB DDR3L 1333MHz SDRAM (single SO-DIMM slot)	Mechanical	1x 3-pin pluggable terminal block for ignition signal and 8~35V DC input
Front Panel I/O Interface		Dimension	205 mm (W) x 145 mm (D) x 44 mm (H)
PoE Port	2x IEEE 802.3at (25.5W) Gigabit Ethernet ports by Intel® I210	Weight	1.9 kg (incl. CPU, memory and HDD)
Video Port	1x DB-15 connector for analog RGB, supporting 2560 x 1600 resolution	Mounting	Patented shock-absorbing wall-mount (standard) or DIN-rail (optional)
Serial Port	2x software-programmable RS-232/ 422/ 485 (COM1 & COM2)	Environmental	
USB	1x USB3.0 port and 3x USB2.0 ports	Operating Temperature	-25°C ~ 70°C with SSD, 100% CPU loading */** -10°C ~ 50°C with HDD, 100% CPU loading */**
Back Panel I/O Interface		Storage Temperature	-40°C ~ 85°C
Video Port	1x DVI-I connector with DVI-D output, supporting 2560 x 1600 resolution	Humidity	10%~90% , non-condensing
Audio	1x Mic-in and 1x speaker-out	Vibration	Operating, 5 Grms, 5-500 Hz, 3 Axes (w/ SSD, according to IEC60068-2-64)
Series Port	2x RS-232 (COM3 & COM4)	Shock	Operating, 50 Grms, Half-sine 11 ms Duration (w/ SSD, according to IEC60068-2-27)
CAN bus	1x DB-9 connector for CAN bus communications	Certification	E-Mark for vehicle applications CE/ FCC Class A, according to EN 55022 & EN 55024
Storage Interface			
SATA HDD	1x internal SATA port for 2.5" HDD/ SSD installation		
mSATA	1x internal half-sized mSATA (SATA + USB)		


* The 100% CPU loading is applied using Passmark® BurnInTest™ v7.0. For detail testing criteria, please contact Neosys Technology

** For sub-zero operating temperature, a wide temperature HDD drive or Solid State Disk (SSD) is required.

Appearance

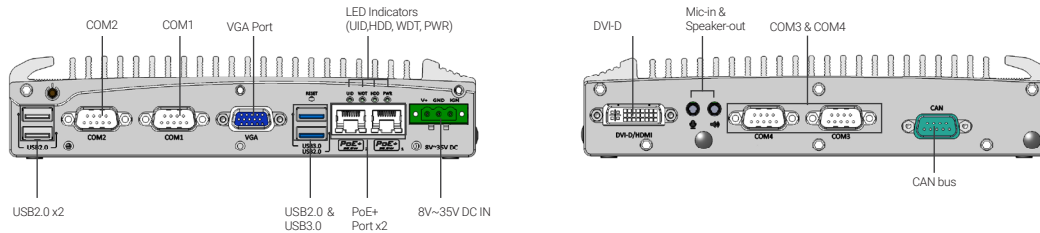

Dimensions

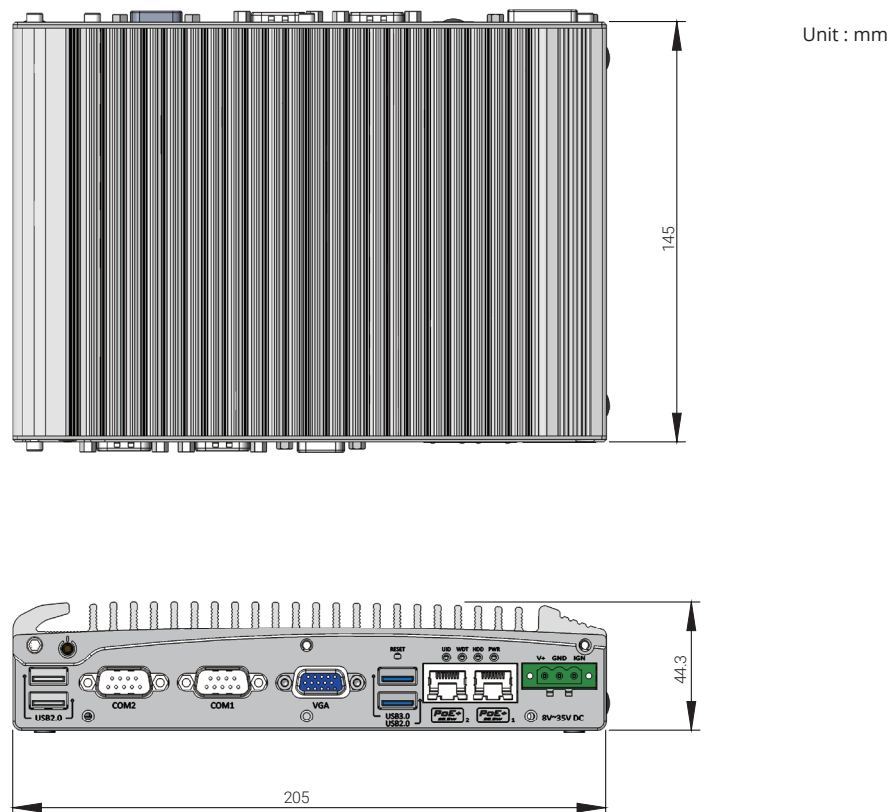

Ordering Information

Model No.	Product Description
Nuvo-2510VTC	Intel® Atom™ E3845 in-vehicle fanless computer with 2x IEEE 802.3at PoE+ ports

Optional Accessories

DINRAIL-25	DIN-rail mounting assembly for Nuvo-2510VTC series
PA-60W-OW	60W AC/DC power adapter with 12V, 5A DC output, cord end terminals for terminal block, operating temperature : -30 to 60 °C.

Optional Cellular Module

NSIO-LTE-7455	Cat. 6 LTE embedded socket modem
---------------	----------------------------------