

Box PC

FEATURES

- LGA 1151 socket for 6th/7th Gen. Intel® Core™ i7/i5/i3 or Pentium® / Celeron® Desktop Processor
- Intel® Q170 chipset
- 2x DDR4 SODIMM. max up to 32GB
- Triple independent display supported by 1x DVI-I and 2x DisplayPort
- 2x Intel® GbE supporting Wake-on-LAN and PXE
- 2x 2.5" SATA HDD Bay, 2x mSATA (shared by 2x mini PCIe), and 1x CFast supporting RAID 0, 1, 5, 10
- 3x full-size mini PCIe for communication or expansion modules
- 4x RS-232/422/485 (w/ 2x internal), 4x USB 3.0
- 1x PCIe x16 and 2x PCI expansion
- 8x DI + 8x DO with isolation
- 9 to 50VDC wide range power input supporting AT/ATX mode
- -25°C to 70°C extended operating temperature



SPECIFICATIONS

SYSTEM

Processor
Support 6th & 7th Gen Intel® Core™ i7 / i5 / i3 / Pentium® / Celeron® Desktop Processor (LGA 1151)

- 7th Gen Intel® Core™ i7-7700T, Quad Core, 8MB cache, up to 3.8 GHz
- 7th Gen Intel® Core™ i5-7500T, Quad Core, 6MB cache, up to 3.3 GHz
- 7th Gen Intel® Core™ i3-7101TE, Dual Core, 3MB Cache, 3.4 GHz
- 6th Gen Intel® Core™ i7-6700TE, Quad Core, 8MB cache, up to 3.4 GHz
- 6th Gen Intel® Core™ i5-6500TE, Quad Core, 6MB Cache, up to 3.3 GHz
- 6th Gen Intel® Core™ i3-6100TE, Dual Core, 4MB Cache, 2.7 GHz
- Intel® Pentium® G4400TE, Dual Core, 3MB Cache, 2.4 GHz
- Intel® Celeron® G3900TE, Dual Core, 2MB Cache, 2.3 GHz

System Chipset Intel® Q170 Express Chipset

LAN Chipset GbE1: Intel® I210-AT (Support Wake-on-LAN and PXE)
GbE2: Intel® I219LM (Support Wake-on-LAN and PXE)

Audio Codec Realtek ALC888S

System Memory 2x DDR4 1866/2133MHz SODIMM.
Max. up to 32GB

BIOS AMI 128Mbit SPI BIOS

Watchdog Software Programmable Supports 1~255 sec.
System Reset

DISPLAY

VGA Yes (by optional split cable)

DVI 1x DVI-I

DisplayPort 2x DisplayPort

Multiple Display Triple Display

STORAGE

SSD/HDD 2x Removable 2.5" SATA HDD Bay
Support RAID 0, 1, 5, 10

mSATA 2x mSATA (shared by 2x Mini PCI Express)

CFast 1x CFast

EXPANSION

Mini PCI Express 3x full-size Mini PCIe (shared by 2x mSATA)

PCI Express 1x PCIe x16

PCI 2x PCI

I/O

COM 2x RS-232/422/485
2x RS-232/422/485 (internal)

USB 4x USB 3.0

LAN 2x RJ45

Audio 1x Mic-in, 1x Speaker-out

DIO 8 in / 8 out (Isolated)

Others 2x WiFi Antenna Holes
1x Power Switch, 1x AT/ATX Switch

OPERATING SYSTEM

Windows 6th Gen CPU: Windows 10, Windows 7, WES7
7th Gen CPU: Windows 10

Linux Linux kernel 4.X

POWER

Power Mode AT, ATX

Power Supply Voltage 9~50VDC

Power Connector 3-pin Terminal Block

Power Adaptor Optional AC/DC 24V/5A, 120W

Power Protection OVP (Over Voltage Protection)
OCP (Over Current Protection)
Reverse Protection

ENVIRONMENT

Operating Temp. -25°C to 70°C

Storage Temp. -40°C to 85°C

Relative Humidity 10% to 95% (non-condensing)

Vibration With SSD: 3 Grms, 5 - 500 Hz, 0.5 hr/axis
With HDD: 1 Grms, 5 - 500 Hz, 0.5 hr/axis

Shock With SSD: 50G, half sine, 11ms

Standards / Certification CE, FCC Class A

PHYSICAL

Construction Extruded Aluminum with Heavy Duty Metal


Dimension 157 (W) x 256 (D) x 240 (H) mm

Weight 5.86 kg

Mounting Wall / Book Mounting
DIN-Rail Mounting (Optional)


Box PC

EXTERNAL I/O MECHANICAL LAYOUT

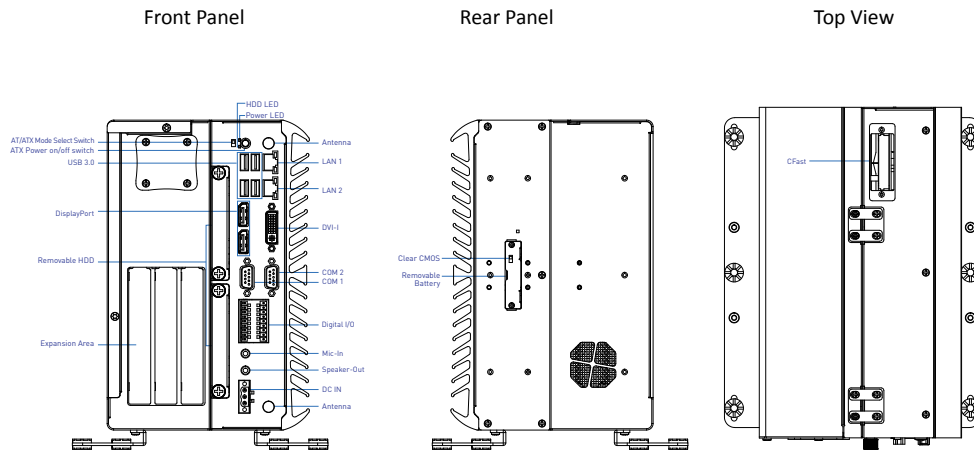

DIMENSION

Unit: mm

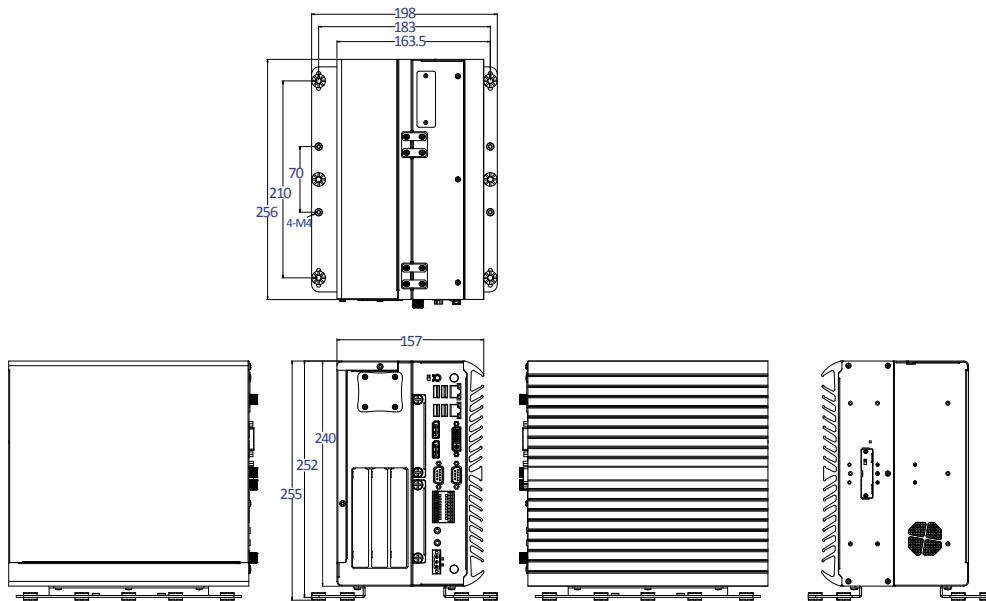

AVAILABLE MODELS

| MODEL NO. | DESCRIPTION |
|-----------|--|
| VCO-6033C | Superior Machine Vision System with LGA 1151 for Intel® 6 th /7 th Gen Processor and Q170 PCH, 1x PCIe x16, 2x PCI |

OPTIONAL ACCESSORIES

| MODEL NO. | DESCRIPTION |
|-------------|---|
| 1-E09A12002 | Adapter AC/DC 24V 5A 120W with 3pin Terminal Block Plug 5.0mm Pitch |
| SFICBL022 | Power Cord, 3-pin US Type, 180cm |
| 1-TPCD00002 | Power Cord, European Type |
| 1-TPCD00001 | Power Cord, 3-pin UK Type, 180cm |

PACKING LIST

- 1x VCO-6000 Series Embedded System
- 1x Utility DVD Driver
- 1x Wall Mount Kit
- 1x Accessory Kit
- 1x DVI to VGA Adapter